




Power Quality Systems

## Liebert PSP XT

450 - 700 - 1250 VA



Surge Protection  
for Data Lines



USB and Serial  
Communications Port



Professional  
Desktop PCs



Point-of-Sale  
Terminals

## Liebert PSP XT

### Comprehensive Power Protection for Stand-Alone System



Thanks to the new Liebert PSP XT you can have continuous cost-effective power protection in your office or home.

It is specifically designed to protect PCs, Workstations, Network Nodes and also Fax, Scanners and Audio/Video equipment.

If the mains supply fails or moves outside an acceptable level, the Liebert PSP XT offers up to 20 minutes of battery back up (depending on the actual load), giving ample time to protect the equipment and save files through Liebert's WEB based MultiLink Software.

### Benefits


- Protection up to 1250 VA
- Small Dimensions
- Plug and Play Operation
- Up to 4 Output Sockets
- Direct and Remote Monitoring
- MultiLink Software included
- Communication Cable included
- Attractive Design
- Phone, Modem, Datalines Surge Suppression Sockets
- USB Communication


### Applications

- PCs
- Workstations
- Small Servers and Network Nodes
- Fax
- Scanners
- Audio/Video Equipment

### MultiLink Software

- Multilink Software is the world's first UPS Software to be written in Java
- Operating with any Liebert UPS , it protects the network PCs or Servers from crashes caused by power failure
- Prevents the loss of valuable data by performing unattended, orderly shutdown on one computer or multiple networked computers with optional license kit
- Configurable responses to UPS status changes
- Notification via alphanumeric pagers, e-mail and on-screen messages
- It runs as part of an enterprise-wide SNMP solution or as stand alone shutdown management for a single file server
- Manage and monitor UPSs over the network with optional license kit

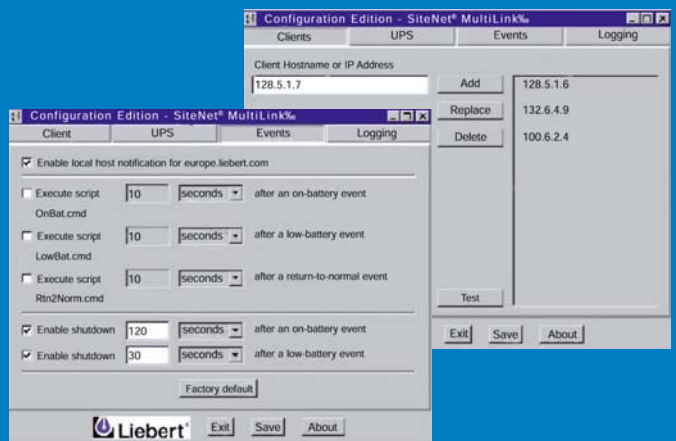

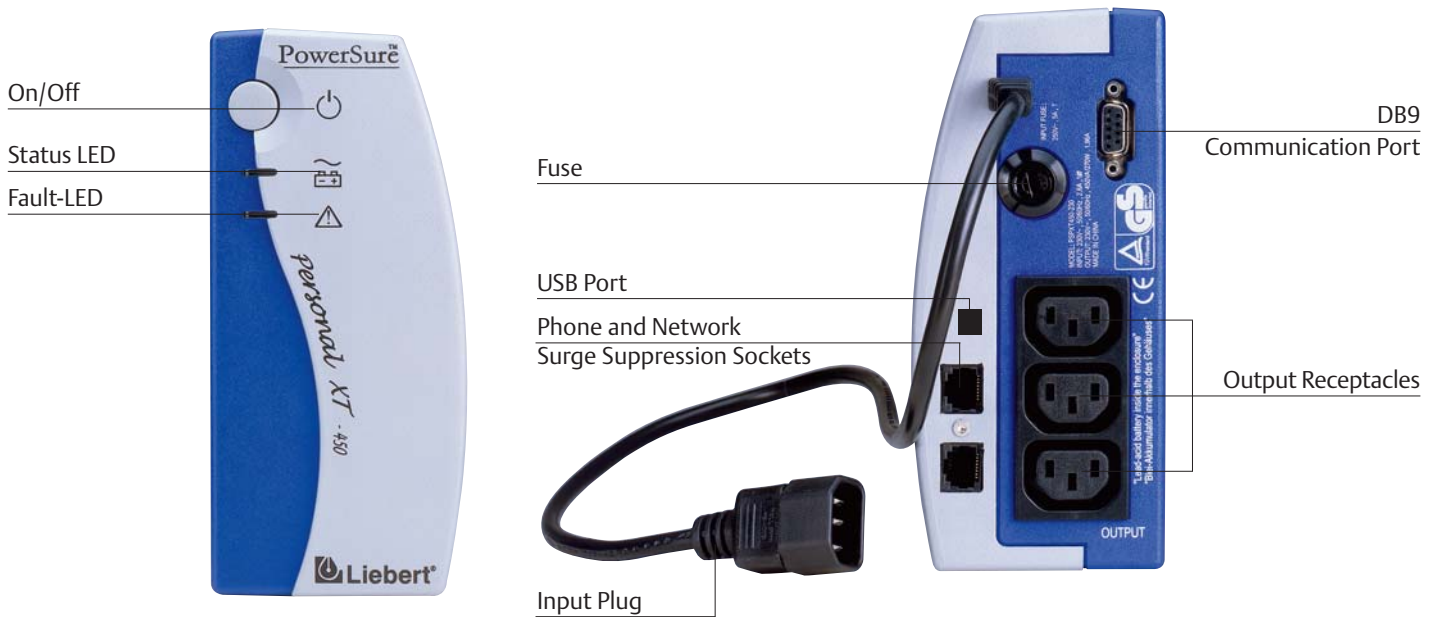

## Major Features

### Protection up to 1250 VA

The Liebert PSP XT is available in 3 power ratings: 450, 700, 1250 VA and covers all the applications from single PCs to network nodes through multiple workstation.

### The smallest UPS in its range

The high frequency design of the Liebert PSP XT results in a very compact UPS. It can operate on your desk or on the floor, in vertical or horizontal position, protecting your computer equipment and your data using very little space.

### Plug and play

The Liebert PSP XT is very easy to use: the simple operation and the two LEDs provide you clear and complete information about the UPS status.

### Everything you need is in the box

The Liebert PSP XT comes complete with: UPS and User Manual, two output power cords communication cable, MultiLink software CD, and warranty card.

### Little maintenance

The Liebert PSP XT requires very little maintenance: only the 5-years battery requires replacement. An automatic battery test verifies battery conditions and, if they are bad, a specific alarm is activated.

### Output connection flexibility

The Liebert PSP XT is equipped with up to four UPS protected output sockets to allow the maximum of flexibility in connecting several loads.

### Phone and network surge suppression sockets

Surge sockets protect sensible hardware against voltage surges coming from lines (such as modem, fax, phone, network connections) which can seriously damage comms ports, motherboards, etc...

### Direct and remote monitoring

The DB9 communication port and MultiLink Software (provided) allow you to monitor your Liebert PSP XT or to shut down your PC directly through the cable (provided) or remotely through the Net.

### More features

Standard features include automatic battery test and "autorestart" function (the UPS automatically restarts when mains comes back after an extended outage and full discharge of the battery). Audible and visual alarms for mains failure, low battery, UPS overload, short circuit, and over temperature are available.

### Attractive design

The Liebert PSP XT, with its ergonomic shape was specifically designed to be an attractive addition to any office or home.

## General Features [Liebert PSP XT]

Model	PSPXT450-230USB	PSPXT700-230USB	PSPXT1250-230USB
Technology		Off-Line	
Power rating	450 VA - 270 W	700 VA - 420 W	1250 VA - 750
<b>Input</b>			
Voltage		230 VAC (197 - 262 VAC)	
Frequency		50Hz ± 4Hz; 60Hz ± 4Hz	
Amperage (maximum)	2.6 A	4.0 A	7.0 A
<b>Output</b>			
Voltage		230 VAC ± 10%	
Frequency		50Hz/60Hz ± 1Hz	
Wave form		STEP	
<b>Battery</b>			
Type		Valve-regulated, nonspillable, lead acid	
Quantity x Voltage x Rating	(1) x 12V x 7 Ah	(1) x 12V x 9 Ah	(2) x 12V x 7 Ah
Approved Battery Manufacturers		CSB, Panasonic, BB Battery and Yuasa	
Transfer Time		< 10 ms typical	
Operating Back up		time > 10 minutes	
Recharge time		8hr up to 90%	
<b>Connections</b>			
Input sockets		1 x EN60320/C14	
Output sockets	3 x EN60320/C13	3 x EN60320/C13	4 x EN60320/C13
DB9 Communication port		Yes	
Surge Suppression Sockets		Yes	
<b>Physical</b>			
Dimensions wxhxd (mm)	80*176,5*233	80*176,5*233	92*238*283
Shipping Dimensions wxhxd (mm)	155*270*300	155*270*300	192*347*390
Net Weight, Kg	3.5	3.6	6.5
Gros Weight, Kg	4.5	4.6	7.9
<b>Operating Environment</b>			
Operation temperature		0°C to 40°C	
Storage Temperature		-15°C to 40°C	
Operation humidity		20% to 90%	
<b>Packaging</b>			
N° of Output Cables		2	
MultiLink Software		CD Included	
MultiLink Communication		Cable Included	
Standard Warranty		2 years	
Warranty Extention (1 or 3 years)		Available	

\* Note: Actual Weights will vary depending on installed options.

While every precaution has been taken to ensure accuracy and completeness in this brochure, Liebert Corporation assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. © 2000 Liebert Corporation. All rights reserved throughout the world. Specifications subject to change without notice. All names referred to are trademarks or registered trademarks of their respective owners.



Emerson Network Power EMEA  
Liebert UPS Headquarters  
Via Leonardo da Vinci, 8  
35028 - Piove di Sacco (PD) - Italy  
tel. +39 049 9719111 - fax +39 0495841257  
marketing.emea@emersonnetworkpower.com

Emerson Network Power Global Service  
Via Leonardo da Vinci, 8  
35028 - Piove di Sacco (PD) - Italy  
tel. +39.049 9719111 fax +39 049 9717053  
service.emea@emersonnetworkpower.com

Emerson Network Power Ltd - UK  
Fourth Avenue, Globe Park - Marlow  
Buckinghamshire - SL71YG  
tel. +44 1628 403200 fax +44 1628 403203